



INSTITUT NATIONAL DE RECHERCHE EN INFORMATIQUE ET EN AUTOMATIQUE

## ***Poisson-Voronoi Spanning Trees***

*with Applications to the Optimization of Communication Networks*

François Baccelli , Sergei Zuyev

**N° 3040**

Novembre 1996

THÈME 1







## Poisson-Voronoi Spanning Trees

with Applications to the Optimization of Communication Networks

François Baccelli , Sergei Zuyev

Thème 1 — Réseaux et systèmes

Projet MISTRAL

Rapport de recherche n° 3040 — Novembre 1996 — 25 pages

**Abstract:** We define a family of random trees in the plane. Their nodes of level  $k$ ,  $k = 0, \dots, m$  are the points of a homogeneous Poisson point process  $\Pi_k$ , whereas their arcs connect nodes of level  $k$  and  $k + 1$ , according to the least distance principle: if  $V$  denotes the Voronoi cell w.r.t.  $\Pi_{k+1}$  with nucleus  $x$ , where  $x$  is a point of  $\Pi_{k+1}$ , then there is an arc connecting  $x$  to all the points of  $\Pi_k$  which belong to  $V$ . This creates a family of stationary random trees rooted in the points of  $\Pi_m$ . These random trees are useful to model the spatial organization of several types of hierarchical communication networks. In relation with these communication networks, it is natural to associate various cost functions with such random trees. Using point process techniques, like the exchange formula between two Palm measures, and integral geometry techniques, we show how to compute the average cost in function of the intensity parameters of the Poisson processes. The formulas which are derived for the average value of the cost function are then exploited for parametric optimization purposes.

**Key-words:** spanning tree, stochastic modeling, cellular network, Voronoi tessellation, point process, Poisson process

**OR/MS Subject Classification:** Probability: stochastic model applications; Networks/graphs: stochastic; Communications; Transportation: network models.

**AMS 1991 Subject Classification** Primary : 60D05, 90B12, 93A13  
Secondary : 60G09, 60G10, 60K99, 90A25, 90A58

(Résumé : tsvp)

The work was supported by CNET through the research grant CTI 1B 104

# Arbres Couvrants de Poisson-Voronoi

## et applications à l'optimisation de réseaux de communication

**Résumé :** Nous définissons une famille d'arbres aléatoires du plan. Leurs noeuds de niveau  $k$ ,  $k = 0, \dots, m$ , sont les points d'un processus ponctuel de Poisson  $\Pi_k$ , et leurs arcs relient les noeuds de niveau  $k$  à ceux de niveau  $k+1$  selon le principe du plus court chemin: si l'on appelle  $V$  la cellule de Voronoï par rapport à  $\Pi_{k+1}$  de centre  $x$ , où  $x$  est un point de  $\Pi_{k+1}$ , on relie par un arc le point  $x$  à tout point de  $\Pi_k$  qui appartient à  $V$ . Ceci définit une famille stationnaire d'arbres aléatoires qui permettent de modéliser l'organisation hiérarchique de certains réseaux de communication. En relation avec ces problèmes, il est naturel d'associer des fonctions de coût à ces arbres. Nous montrons comment calculer les moyennes de ces fonctions de coût grâce à des outils mathématiques issus de la théorie des processus ponctuels, comme la formule d'échange entre deux mesures de Palm, et de la géométrie intégrale. Dans certains cas, on peut obtenir des formules explicites pour ces fonctions de coût moyennes et procéder à une optimisation paramétrique explicite des intensités des divers processus ponctuels mis en jeu.

## 1 Introduction

Consider the following distribution problem: a family of *concentration* points is given, characterized by their random coordinates in the plane. Another family of *subscribers* is also given, with a similar characterization via the set of their random coordinates. A typical example, which is the one considered throughout this paper, is that when both point processes are homogeneous Poisson processes, although more general cases can also be considered along the same lines.

Assume one has to connect each subscriber to exactly one concentrator. A typical example is that where the concentrators are all linked by a connected network, so that when each subscriber is connected to one concentrator, it is actually interconnected to all subscribers as well.

For connecting each subscriber to one concentrator, one can either use a direct link, or an indirect link via some *distribution* point. A distribution point is a location where several links originating from subscribers can be grouped into one further link to some concentrator with some economy of scale (see Figure 2).

The first problem that we consider in this paper is that of the optimal use of such distribution points. We do not address the problem of a minimal spanning tree structure, which is a quite different combinatorial optimization question. We restrict ourselves to a parametric optimization which consists in introducing an independent Poisson process of distribution points and in determining the intensity of this process which minimizes a cost function which reflects the economy of scale alluded to above. The general assumption is that connections are always to the closest point (i.e. each subscriber is connected to the closest distribution point, and each distribution point to the closest concentrator); the Voronoi cells associated with the Poisson point processes play therefore a central role in the construction of these trees.

The paper is structured as follows: Section 2 gives the basic model and a precise definition of the cost function, together with the main characteristics of the optimal parametric model. Section 3 focuses on an extension of this to a hierarchical model with several layers which was proposed in [2] to describe the structure of certain communication networks, and which includes the basic model of §2 as a special case. Finally, Sections 4 and 5 give some extensions of the optimization method proposed in §1-2 to related problems, also arising in communication network modeling, and also based on Poisson-Voronoi tessellations and trees: a non purely hierarchical model is considered in §4, a tracking problem in mobile communications in §5.1, and a class of infinite spanning graphs in §5.2.

Although the models are described throughout the paper are originating from communication problems, it is worthwhile stressing that they are generic in that they could in principle be applied to other planar or spatial distribution problems, where randomness is natural.

## 2 Three level connection systems

### 2.1 Stochastic Assumptions

Consider 3 independent homogeneous Poisson processes  $\Pi_i$  ( $i = 0, 1, 2$ ) in the plane  $\mathbb{R}^2$  with intensities  $\lambda_i$ , representing *subscribers* (process  $\Pi_0$ ), *distribution points* (process  $\Pi_1$ ) and *concentrators* (process  $\Pi_2$ ), respectively.

Random trees are built from any realizations of these three point processes as follows: each point of the process  $\Pi_0$  is connected to a point of process  $\Pi_1$  according to the least distance principle. Similarly, each points of  $\Pi_1$  is connected to the closest point of the process  $\Pi_2$  (this closest point is almost surely uniquely defined under the above Poisson and independence assumptions).

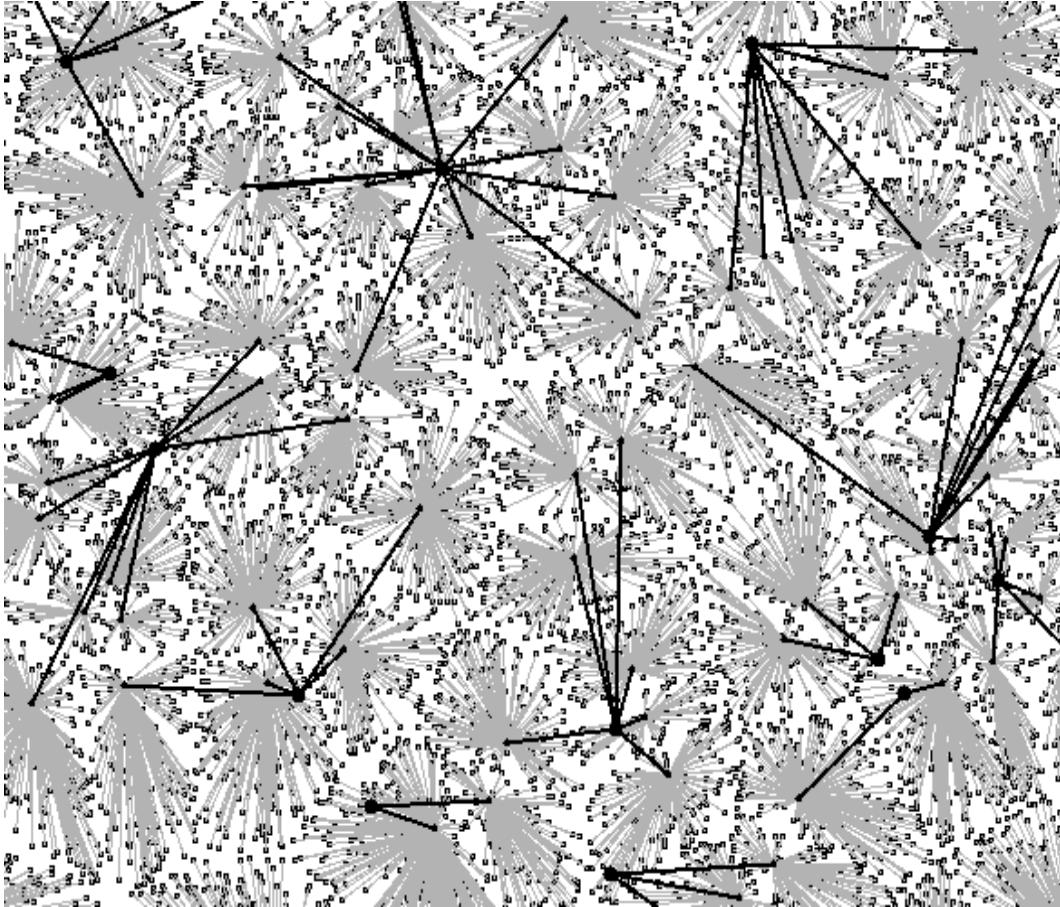


Figure 1: A family of Poisson-Voronoi trees of height two.

A typical realization of such Poisson-Voronoi trees is shown in Figure 1.

## 2.2 Cost function via an example

There is a cost function associated with such random trees. This cost function is perhaps best described through a physical example. In this example, the connections represent links. Each link has an associated cost which consists of two parts:

1. the *capacity cost* which represents the cost of the communication medium (e.g. optical fiber, copper etc.) and

2. the *infrastructure cost*, which represents the cost of the civil engineering (trench, poles etc.) which supports the medium.

In our example, the capacity cost for connecting a point of  $\Pi_i$  to the closest point of  $\Pi_{i+1}$ , is given by a function of the form  $A_{i,i+1}r^{\alpha_{i,i+1}}$ , where  $r$  is the distance between the points and  $A_{i,i+1}$ ,  $\alpha_{i,i+1}$  are some non-negative parameters. This example of non-linear dependence in the variable  $r$  (more general cases will be considered in the next section) stems from the fact that the type of medium to be used depends on the distance  $r$ .

The infrastructure cost is also assumed to be given by a polynomial function of the form  $B_{i,i+1}r^{\beta_{i,i+1}}$ , where  $B_{i,i+1}$ ,  $\beta_{i,i+1} > 0$ . Note that the cables from a distribution point to a concentrator share the same civil engineering, and it is reasonable to assume that the cost of civil engineering does not depend on the number of cables which are grouped there. The various elements of this cost structure are illustrated in Figure 2.

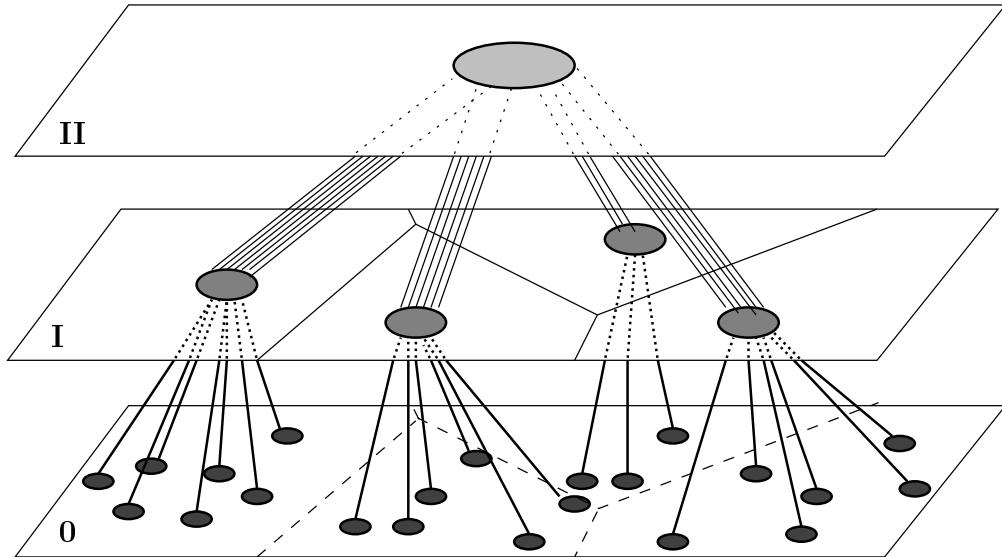


Figure 2: Links in a three-level model

Our first question is the following: given the intensities  $\lambda_0$ ,  $\lambda_2$  of the subscriber and concentrator point processes and a cost  $C_1$  associated with the introduction of a distribution point, what is the intensity  $\lambda_1$  of the distribution point process which minimizes the average total cost?

### 2.3 Mathematical formulation

More precisely, the cost function is the following:

$$\begin{aligned}
 G \stackrel{\text{def}}{=} \mathbf{E}_2^0 \left[ \sum_{y_i \in \Pi_1 \cap V_0(\Pi_2)} [C_1 + B_{1,2}|y_i|^{\beta_{1,2}} + A_{1,2}|y_i|^{\alpha_{1,2}} \mathcal{N}_{y_i} \right. \\
 \left. + \sum_{x_j \in \Pi_0 \cap V_{y_i}(\Pi_1)} (B_{0,1}|x_j - y_i|^{\beta_{0,1}} + A_{0,1}|x_j - y_i|^{\alpha_{0,1}}) ] \right]. \quad (1)
 \end{aligned}$$

Here and below,

- $\mathbf{E}_k^0$  denotes the expectation with respect to the Palm distribution  $\mathbf{P}_k^0$  with respect to the point process  $\Pi_k$ ;
- $V_x(\Pi_k)$  is the Voronoi cell constructed with respect to  $\Pi_k$ , with nucleus  $x \in \Pi_k$ ;
- $\mathcal{N}_x$  is the number of  $\Pi_0$ -points linked to the point  $x$ .

For more on definitions and properties of these objects and the ones used below, see the Appendix. Using Neveu's exchange formula (28), which describes the relationship between the two Palm distributions  $\mathbf{P}_1^0$  and  $\mathbf{P}_2^0$ , the expression for the cost function simplifies to

$$\frac{\lambda_1}{\lambda_2} C_1 + \frac{\lambda_1}{\lambda_2} \mathbf{E}_1^0 [B_{1,2}|z_0|^{\beta_{1,2}} + A_{1,2}|z_0|^{\alpha_{1,2}} \mathcal{N}_0 + \sum_{x_j \in \Pi_0 \cap V_0(\Pi_1)} (B_{0,1}|x_j|^{\beta_{0,1}} + A_{0,1}|x_j|^{\alpha_{0,1}})], \quad (2)$$

where  $z_0$  here denotes the point of the process  $\Pi_2$  which is the closest to 0.

On the other hand, for all  $a > 0$ , if one denotes  $S_{|x|}(u)$  the open ball centered in  $u$  and with radius  $|x|$ ,

$$\begin{aligned} \mathbf{E}_1^0 |z_0|^a &= \mathbf{E}_1^0 \int |x|^a \mathbb{I}\{\Pi_2(S_{|x|}(0)) = 0\} \Pi_2(dx) \\ &= \mathbf{E} \int |x|^a \mathbb{I}\{\Pi_2(S_{|x|}(0)) = 0\} \Pi_2(dx) \\ &= \lambda_2 \int |x|^a \mathbf{P}_2^0[\Pi_0(S_{|x|}(-x)) = 0] dx \\ &= 2\pi\lambda_2 \int_0^\infty r^{a+1} \exp\{-\lambda_2\pi r^2\} dr = \frac{\Gamma(\frac{a}{2} + 1)}{(\pi\lambda_2)^{\frac{a}{2}}}, \end{aligned} \quad (3)$$

where the second equality follows from the independence of  $\Pi_1$  and  $\Pi_2$ , and the third from Campbell's refined formula (  $\Gamma(\cdot)$  here is the Euler Gamma-function).

Denote by  $T_i$ ,  $i = 1, 4$ , the  $i$ -th term of the sum in the expectation in (2). In view of (3), we have

$$\mathbf{E}_1^0 T_1 = \frac{B_{1,2}}{(\pi\lambda_2)^{\frac{\beta_{1,2}}{2}}} \Gamma\left(\frac{\beta_{1,2}}{2} + 1\right).$$

To compute the expectation of the second term, note that when the origin is occupied by a point of the process  $\Pi_1$  the variables  $|z_0|$  and  $\mathcal{N}_0$  are independent since they are functions of two independent processes  $\Pi_2$  and  $\Pi_0 \cup \Pi_1$ , respectively. It is easily seen that  $\mathbf{E}_1^0 \mathcal{N}_0 = \lambda_0/\lambda_1$  (more complete results on geometry of random points in a typical Voronoi cell can be found in [5]) and we obtain

$$\mathbf{E}_1^0 T_2 = A_{1,2} \mathbf{E}_1^0 |z_0|^{\alpha_{1,2}} \mathbf{E}_1^0 \mathcal{N}(0) = \frac{A_{1,2}\lambda_0}{\lambda_1(\pi\lambda_2)^{\frac{\alpha_{1,2}}{2}}} \Gamma\left(\frac{\alpha_{1,2}}{2} + 1\right).$$

Similarly, using once more the above exchange formula (28), but this time between  $\mathbf{E}_1^0$  and  $\mathbf{E}_0^0$ , we get

$$\lambda_1 \mathbf{E}_1^0 [T_3 + T_4] = \frac{B_{0,1}\lambda_0}{(\pi\lambda_1)^{\frac{\beta_{0,1}}{2}}} \Gamma\left(\frac{\beta_{0,1}}{2} + 1\right) + \frac{A_{0,1}\lambda_0}{(\pi\lambda_1)^{\frac{\alpha_{0,1}}{2}}} \Gamma\left(\frac{\alpha_{0,1}}{2} + 1\right).$$

Combining the above expressions, we get the following explicit expression for the cost function:

$$G = H_1 \lambda_1 + H_2 + H_3 \lambda_1^{-\frac{\beta_{0,1}}{2}} + H_4 \lambda_1^{-\frac{\alpha_{0,1}}{2}}, \quad (4)$$

where

$$\begin{aligned} H_1 &= \frac{B_{1,2}}{\pi^{\frac{\beta_{1,2}}{2}} \lambda_2^{\frac{\beta_{1,2}}{2}+1}} \Gamma\left(\frac{\beta_{1,2}}{2} + 1\right) + \frac{C_1}{\lambda_2}; \\ H_2 &= \frac{A_{1,2} \lambda_0}{\pi^{\frac{\alpha_{1,2}}{2}} \lambda_2^{\frac{\alpha_{1,2}}{2}+1}} \Gamma\left(\frac{\alpha_{1,2}}{2} + 1\right); \\ H_3 &= \frac{B_{0,1} \lambda_0}{\pi^{\frac{\beta_{0,1}}{2}} \lambda_2} \Gamma\left(\frac{\beta_{0,1}}{2} + 1\right); \\ H_4 &= \frac{A_{0,1} \lambda_0}{\pi^{\frac{\alpha_{0,1}}{2}} \lambda_2} \Gamma\left(\frac{\alpha_{0,1}}{2} + 1\right). \end{aligned}$$

We see that the cost function has a unique minimal value, attained in the point  $\lambda_1^*$  which solves the equation

$$H_3 \beta_{0,1} \lambda_1^{-\frac{(\beta_{0,1}+1)}{2}} + H_4 \alpha_{0,1} \lambda_1^{-\frac{(\alpha_{0,1}+1)}{2}} = 2H_1.$$

In particular case when  $\beta_{0,1} = \alpha_{0,1} \stackrel{\text{def}}{=} \alpha$  we obtain

$$\lambda_1^* = \left[ \frac{\alpha(H_3 + H_4)}{2H_1} \right]^{\frac{2}{2+\alpha}}$$

and the minimal value of the cost function is equal to

$$G(\lambda_1^*) = \frac{\alpha+2}{\alpha} H_1^{\frac{\alpha}{2+\alpha}} \left[ \frac{\alpha}{2} (H_3 + H_4) \right]^{\frac{2}{2+\alpha}} + H_2.$$

For  $\alpha = 1$  and  $\alpha_{1,2} = \beta_{1,2} = 1$ , we obtain

$$\lambda_1^* = \lambda_2^{\frac{1}{3}} \left[ \frac{\lambda_0(A_{0,1} + B_{0,1})}{2B_{1,2} + 4C_1 \lambda_2^{1/2}} \right]^{\frac{2}{3}}$$

and

$$\mathbf{E}_2^0 G = \frac{1}{\lambda_2} \left[ 3 \left( B_{1,2} \lambda_2^{1/3} + C_1 \right)^{1/3} \left( \frac{\lambda_0}{4} (A_{0,1} + B_{0,1}) \right)^{2/3} + \frac{A_{1,2}}{2} \lambda_0 \lambda_2^{1/3} \right].$$

The upper curve in Figure 5 shows a typical example of the cost function of a three level system. A more detailed discussion can be found in Section 4.3.

### 3 Hierarchical model

#### 3.1 The model

Consider the following extension of the models introduced in §2: there are  $m \geq 3$  independent homogeneous Poisson processes  $\Pi_k$ ,  $k = 0, 1, \dots, m$ , in  $\mathbb{R}^2$  with respective intensities  $\lambda_k$ .

We will use a terminology which continues that of our typical example so as to make things more easy to name and manipulate: the point process  $\Pi_0$  represents the network *subscribers*, whereas the point processes  $\Pi_1, \Pi_2, \Pi_3$ , etc. represent *distribution points* or stations of various levels in the hierarchy. Of course in practice, we should have  $\lambda_0 > \lambda_1 > \dots > \lambda_m$ , although this is not mandatory in our mathematical treatment.

Associated with the realizations of these point processes, which can be seen as denumerable collections of nodes located in the plane, one then defines arcs between certain pairs of nodes, which are built following the least distance hierarchical principle: for all  $k = 1, \dots, m$ , each point of  $\Pi_{k-1}$  is connected to the point of  $\Pi_k$  which is the closest. Equivalently, with each station  $x_j$  of level  $k$ , if one denotes  $V_{x_j}(\Pi_k)$  the Voronoi cell with nucleus  $x_j$  constructed with respect to  $\Pi_k$ , each point of  $\Pi_{k-1}$  lying inside  $V_{x_j}(\Pi_k)$  has an arc connecting it to  $x_j$ . These arcs represent connections or links in the communication network.

This set of arcs defines a random graph on the nodes, which can be decomposed into a denumerable family of connected subgraphs which are all random trees of level  $m$  at most; there is one such tree rooted in each point of  $\Pi_m$  (see Fig. 2), and this tree has subscribers or points of  $\Pi_k$ ,  $k = 1, \dots, m$ , as leaves. For instance, if the Voronoi cell  $V_x(\Pi_m)$  is empty of points of  $\Pi_{m-1}$ , then  $x$  is both a root and a leaf of the tree rooted in  $x$ . The random trees in this family are strongly dependent, but identically distributed. In that, this family is a collection of spanning trees allowing one to reach a certain subset of the set of subscribers from each root via some distribution points of levels  $m-1, \dots, 1$ . So if the roots are interconnected, each subscriber can be connected via a finite set of arcs to any other subscriber of the plane.

### 3.2 Description of the cost function via the communication example

Roughly speaking, the cost of each such tree consists of the cost of all the connections and stations of lower levels linked to its root. In our communication example:

- each point of  $\Pi_k$  has a cost associated with the installation and maintenance of the corresponding station of level  $k$ , which we denote  $C_k$ .
- each arc from a node  $x_j$  of  $\Pi_k$  to a node  $y_l$  of  $\Pi_{k+1}$  has two components in its cost:
  1. The *capacity cost*, namely the cost of the communication medium allowing the interconnection between the subtree rooted in  $x_j$  and  $y_l$ ; this communication medium should allow the network to cope with the set of all subscribers being leaves of this subtree. The capacity cost of this medium is assumed to be given by a function of the form

$$H_{k,k+1}(n)A_{k,k+1}(r),$$

when the number  $\mathcal{N}_{x_j}$  of subscribers of the subtree rooted in  $x_j$  is  $n$ , and when the arch connecting  $x_j$  to  $y_l$  is of length  $r$ . Here  $H$  and  $A$  are non-decreasing real-valued mapping. A typical example is that with  $H_{k,k+1}(n) \equiv n$ , in which case this capacity cost is purely additive in  $\mathcal{N}_{x_j}$ . However, the capacity of a connection is often designed to take advantage of the so-called statistical multiplexing between subscribers, and the function  $H$  is often sub-additive. The function  $A(r)$  will be referred to as the *unit capacity cost* (the capacity cost of the additive case when the variable  $\mathcal{N}_{x_j}$  is equal to 1). The particular case  $A(r) = \text{Const} \cdot r$  and its polynomial generalizations were already commented in §1.

2. The *infrastructure cost*, which is given by a function  $B_{k,k+1}(r)$  which does not depend on  $\mathcal{N}_{x_j}$  by assumption, although it may of course depend on  $k$ .

### 3.3 Definition of the cost function

The cost function is defined recursively through the costs of the subtrees rooted in the points of  $\Pi_k$  for all  $k$ .

Let again  $\mathbf{P}_k^0$  denote the Palm probability of the point process  $\Pi_k$ , and  $\mathbf{E}_k^0$  expectation w.r.t.  $\mathbf{P}_k^0$ . On the Palm probability space of  $\Pi_k$ , there is a station of level  $k$  at the origin, and we define the following random variables (where  $\Pi$  denotes a realization of the family of all point processes  $\Pi_0, \dots, \Pi_m$ , and  $\{\theta_x\}$  the group of translations of all these point processes – see the Appendix):

- $\mathcal{C}(\Pi)$  is the cost of the station in the origin (i.e.  $C_k$ );
- $G(\Pi)$  is the cost of the subtree rooted in the origin;
- $\mathcal{N}(\Pi)$  ( $= \mathcal{N}_0$ ) is the number of subscribers in this subtree;
- $\mathcal{A}(\Pi)$  the unit capacity cost of the arc from 0 to the nearest point of level  $k+1$ ;
- $\mathcal{B}(\Pi)$  the infrastructure cost of this arc.
- $\mathcal{H}(\Pi, \cdot)$  is the mapping giving the dependence of the capacity cost in  $\mathcal{N}(\Pi)$  (i.e.  $H_{k,k+1}(\cdot)$ ).

For  $k = 0$ , we obviously have  $G(\Pi) = C_0 = \mathcal{C}(\Pi)$  and  $\mathcal{N}(\Pi) = 1$ . For  $k = 1$ ,

$$\begin{aligned} G(\Pi) &= C_1 + \sum_{x_j \in \Pi_0 \cap V_0(\Pi_1)} C_0 + H_{0,1}(1)A_{0,1}(|x_j|) + B_{0,1}(|x_j|) \\ &= \mathcal{C}(\Pi) + \int_{V_0(\Pi_1)} [G(\theta_x \Pi) + \mathcal{H}(\theta_x \Pi, \mathcal{N}(\theta_x \Pi))\mathcal{A}(\theta_x \Pi) + \mathcal{B}(\theta_x \Pi)] \Pi_0(dx). \end{aligned}$$

In general, on the Palm space of  $\Pi_k$ ,

$$G(\Pi) = \mathcal{C}(\Pi) + \int_{V_0(\Pi_k)} [G(\theta_x \Pi) + \mathcal{H}(\theta_x \Pi, \mathcal{N}(\theta_x \Pi))\mathcal{A}(\theta_x \Pi) + \mathcal{B}(\theta_x \Pi)] \Pi_{k-1}(dx).$$

Since under the Palm distribution  $\mathbf{P}_k^0$  ( $k \geq 1$ ) there is a.s. a station of level  $k$  in the origin, we can apply the exchange formula (see (28)) with  $N_1 = \Pi_{k-1}$  and  $N_2 = \Pi_k$  to the Palm expectation of the last expression to obtain

$$\mathbf{E}_k^0 G(\Pi) = C_k + \frac{\lambda_{k-1}}{\lambda_k} \mathbf{E}_{k-1}^0 [G(\Pi) + \mathcal{H}(\Pi, \mathcal{N}(\Pi))\mathcal{A}(\Pi) + \mathcal{B}(\Pi)]. \quad (5)$$

To compute  $\mathbf{E}_{k-1}^0 \mathcal{B}(\Pi)$ , we use Campbell's refined formula as we did it (3) to obtain

$$\begin{aligned} \mathbf{E}_{k-1}^0 \mathcal{A}(\Pi) &= \mathbf{E}_k^0 \int B_{k-1,k}(|x|) \mathbb{I}\{\Pi_k(B_{|x|}(0)) = 0\} \Pi_k(dx) \\ &= \lambda_k \int B_{k-1,k}(|x|) \mathbf{P}_k^0[\Pi_k(B_{|x|}(-x)) = 0] dx \\ &= 2\pi\lambda_k \int_0^\infty r B_{k-1,k}(r) \exp\{-\lambda_k \pi r^2\} dr. \end{aligned}$$

Next observe that the random variable  $\mathcal{N}(\Pi)$  in (5) depends only on  $\Pi_0, \dots, \Pi_{k-1}$ , whereas  $\mathcal{A}(\Pi)$ , like  $\mathcal{B}(\Pi)$ , depends only on  $\Pi_k$ . Therefore

$$\mathbf{E}_{k-1}^0 [H_{k-1,k}(\mathcal{N}(\Pi)) \mathcal{A}(\Pi)] = \mathbf{E}_{k-1}^0 [H_{k-1,k}(\mathcal{N}(\Pi))] \mathbf{E}_k^0 \mathcal{A}(\Pi).$$

Finally, in the particular case when  $H_{k-1,k} = Id$ , it follows from (28) that

$$\begin{aligned} \mathbf{E}_k^0 \mathcal{N}(\Pi) &= \mathbf{E}_k^0 \int_{V_0(\Pi_k)} \mathcal{N}(\theta_x \Pi) \Pi_{k-1}(dx) \\ &= \frac{\lambda_{k-1}}{\lambda_k} \mathbf{E}_{k-1}^0 \mathcal{N}(\Pi) = \dots \\ &= \frac{\lambda_{k-1}}{\lambda_k} \frac{\lambda_{k-2}}{\lambda_{k-1}} \dots \frac{\lambda_0}{\lambda_1} \mathbf{E}_0^0 \mathcal{N}(\Pi) = \frac{\lambda_0}{\lambda_k}, \end{aligned}$$

and therefore

$$\begin{aligned} \mathbf{E}_k^0 G(\Pi) &= C_k + \frac{\lambda_{k-1}}{\lambda_k} \mathbf{E}_{k-1}^0 G(\Pi) \\ &+ 2\pi \int_0^\infty [\lambda_0 A_{k-1,k}(r) + \lambda_{k-1} B_{k-1,k}(r)] r \exp\{-\lambda_k \pi r^2\} dr. \end{aligned}$$

Thus we have proved the following

**Theorem 1.** *In the case  $H_{k,k+1} = Id$  for all  $k$ , for any  $k \geq 1$ , we have*

$$\lambda_k \mathbf{E}_k^0 G = \lambda_{k-1} \mathbf{E}_{k-1}^0 G + W_k = \sum_{n=0}^k W_n \quad (6)$$

where  $W_0 = \lambda_0 C_0$ ,

$$W_n = \lambda_n C_n + \lambda_0 \mathcal{R}_{\lambda_n}(A_{n-1,n}(\bullet)) + \lambda_{n-1} \mathcal{R}_{\lambda_n}(B_{n-1,n}(\bullet)) \quad (7)$$

for  $n \geq 1$  and the integral operator

$$\mathcal{R}_\lambda(f(\bullet)) \stackrel{\text{def}}{=} 2\pi\lambda \int_0^\infty r f(r) e^{-\lambda\pi r^2} dr. \quad (8)$$

*Remark 1.* Operator  $\mathcal{R}_\lambda(f(\bullet))$  can be viewed as the expectation of random variable  $f(\rho_\lambda)$  where  $\rho_\lambda$  follows Rayleigh distribution with the parameter  $1/(2\pi\lambda)$ .

Equation (6) above receives the following natural interpretation: the increment of the cost density between subtrees of level  $k-1$  and  $k$  is equal to the sum of the cost density of the inter-connections between these two levels and the cost density of the  $k$ -level stations.

### 3.4 Example of optimization

Consider a four level system with the unit capacity cost and infrastructure cost depending linearly from the distance:  $A_{i,j}(r) = a_{i,j}r$  and  $B_{i,j}(r) = b_{i,j}r$ , respectively. It is readily seen that the cost function

$\mathbf{E}_3^0 G$  is smooth in  $\mathbb{R}_+^2$ , tends to infinity if  $\lambda_1$  or  $\lambda_2$  tends to 0 or to infinity and the stationary point is given by the following system of equations:

$$\begin{aligned}\lambda_3 \frac{\partial \mathbf{E}_3^0 G}{\partial \lambda_1} &= C_1 + \frac{b_{1,2}}{2\sqrt{\lambda_2}} - \frac{\lambda_0 b_{0,1}}{4\lambda_1^{\frac{3}{2}}} = 0; \\ \lambda_3 \frac{\partial \mathbf{E}_3^0 G}{\partial \lambda_2} &= C_2 + \frac{b_{2,3}}{2\sqrt{\lambda_3}} - \frac{\lambda_0 a_{1,2} + \lambda_1 b_{1,2}}{4\lambda_2^{\frac{3}{2}}} = 0.\end{aligned}$$

Expressing  $\lambda_1$  from the second equation and substituting it in the first one we obtain

$$\begin{aligned}\lambda_1 &= \Phi \lambda_2^{\frac{3}{2}} - \frac{\lambda_0 a_{1,2}}{b_{1,2}}, \\ C_1 + \frac{b_{1,2}}{2\sqrt{\lambda_2}} - \frac{\lambda_0 b_{0,1}}{4\left(\Phi \lambda_2^{\frac{3}{2}} - \frac{\lambda_0 a_{1,2}}{b_{1,2}}\right)^{\frac{3}{2}}} &= 0,\end{aligned}$$

where

$$\Phi = \frac{4}{b_{1,2}} \left( C_2 + \frac{b_{2,3}}{2\sqrt{\lambda_3}} \right).$$

Denoting  $\nu = \sqrt{\lambda_2}$  after some algebra, we get

$$\left( \Phi \nu^3 - \frac{\lambda_0 a_{1,2}}{b_{1,2}} \right)^3 = \frac{\lambda_0^2 b_{0,1}^2 \nu^2}{4(C_1 \nu + b_{1,2})^2}. \quad (9)$$

We see that in the LHS of (9) stands a continuous function which increases from a negative value to infinity, whereas the function in the RHS is positive and decreasing for  $\nu > 0$ . Therefore there exists a unique positive solution to this equation. Noting that the value in the LHS is exactly  $\lambda_1^3$  we conclude that there is a unique positive pair  $(\lambda_1, \lambda_2)$  providing the minimal value of the cost function. A typical form of the cost function is shown in Figure 3.

## 4 Case of direct connections

### 4.1 Model

In the hierarchical model considered in the previous sections, a  $k-1$ -level station is always attached to a  $k$ -level station, even if there are higher level stations closer to it. In this section we let such a station be linked to the station of levels  $k \dots, m$  (see Fig. 4) which is the closest. We consider here only a 3-level system and the case with  $H(n) = n$ ; higher level models can in principle be treated by the same method.

### 4.2 Cost function

We introduce marks associated with the points of  $\Pi_0$ , namely functionals of configurations having a 0-level station located at the origin:

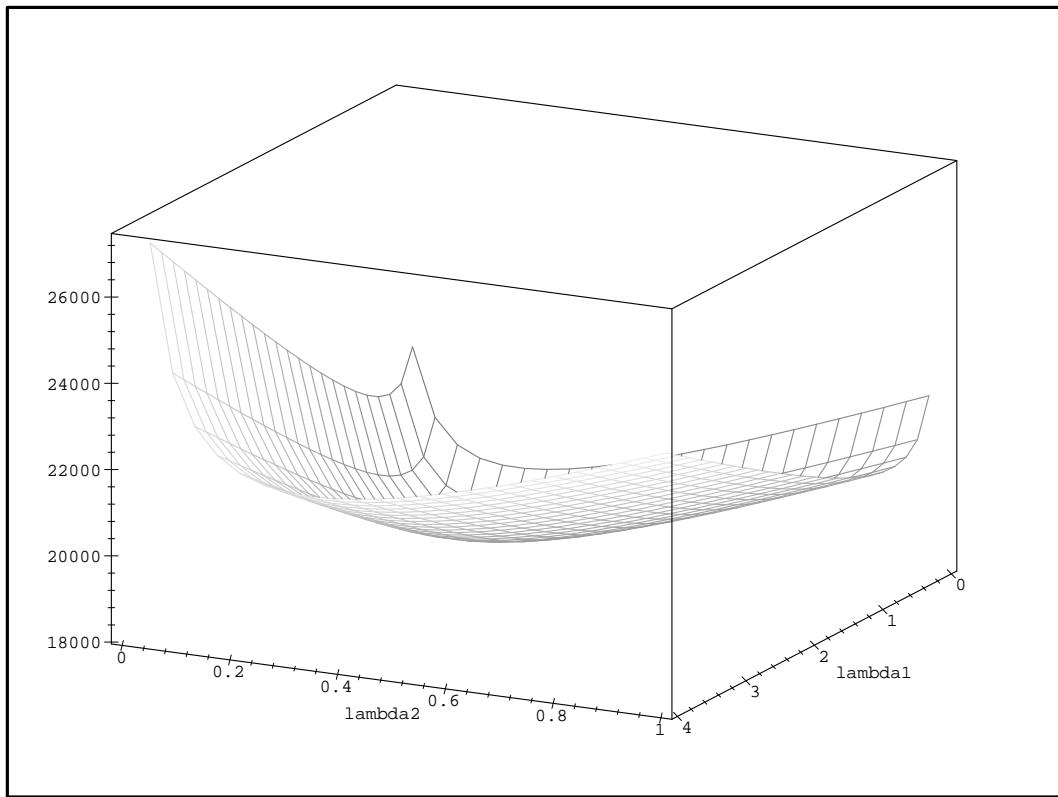


Figure 3: Cost function in a four level hierarchical model.

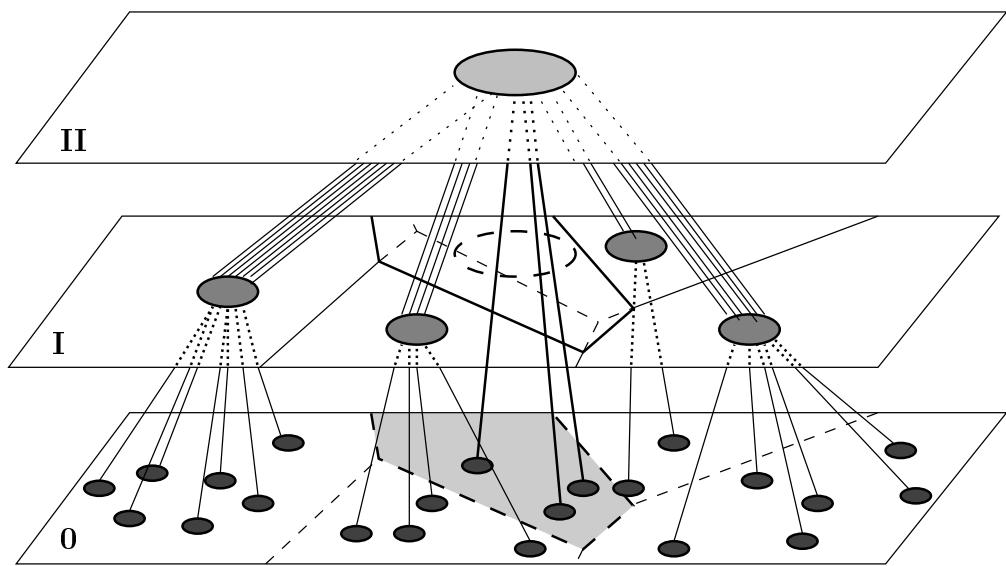


Figure 4: 3-level model with direct connections

$\mathcal{A}'(\Pi)$  is the unit capacity cost of the link from the origin to the nearest 1-st level station if there is no closer 2-nd level station, and 0 otherwise;

$\mathcal{A}''(\Pi)$  is the unit capacity cost of the link from the origin to the nearest 2-nd level station if there is no closer 1-st level, and 0 otherwise;

Infrastructure cost variables  $\mathcal{B}'$  and  $\mathcal{B}''$  are defined similarly. Let  $\mathcal{A}(\Pi) = \mathcal{A}'(\Pi) + \mathcal{A}''(\Pi)$  and  $\mathcal{B}(\Pi) = \mathcal{B}'(\Pi) + \mathcal{B}''(\Pi)$ .

Now under  $\mathbf{P}_1^0$ ,

$$\begin{aligned} G(\Pi) &= C_1 + \sum_{x_j \in \Pi_0 \cap V_0(\Pi_1 \cup \Pi_2)} C_0 + A_{0,1}(|x_j|) + B_{0,1}(|x_j|) \\ &= C_1 + \int_{V_0(\Pi_1 \cup \Pi_2)} [G(\theta_x \Pi) + \mathcal{A}'(\theta_x \Pi) + \mathcal{B}'(\theta_x \Pi)] \Pi_0(dx). \end{aligned} \quad (10)$$

First of all note that due to the well known property of Poisson processes,  $\Pi_1 \cup \Pi_2$  is also a homogeneous Poisson process with intensity  $\lambda_1 + \lambda_2$ . Therefore by Campbell's theorem

$$\mathbf{E}_1^0 \sum_{x_j \in \Pi_0 \cap V_0(\Pi_1 \cup \Pi_2)} C_0 = \lambda_0 C_0 |V_0(\Pi_1 \cup \Pi_2)| = \frac{\lambda_0 C_0}{\lambda_1 + \lambda_2}.$$

In addition, we have  $V_0(\Pi_1 \cup \Pi_2) \subseteq V_0(\Pi_1)$ . But for  $x \in V_0(\Pi_1) \setminus V_0(\Pi_1 \cup \Pi_2)$ , there exists  $z_j \in \Pi_2$  such that  $|x - z_j| < |x|$ , so that  $\mathcal{A}'(\theta_x \Pi) = \mathcal{B}'(\theta_x \Pi) = 0$ . Therefore we can replace the integration domain in (10) by  $V_0(\Pi_1)$  and then apply (28) to write

$$\mathbf{E}_1^0 G = C_1 + \frac{\lambda_0 C_0}{\lambda_1 + \lambda_2} + \frac{\lambda_0}{\lambda_1} \mathbf{E}_0^0 [\mathcal{A}'(\Pi) + \mathcal{B}'(\Pi)].$$

By the same arguments as in the proof of (6), we obtain

$$\begin{aligned} \mathbf{E}_0^0 \mathcal{B}'(\Pi) &= \mathbf{E} \int B_{0,1}(|x|) \mathbb{I}\{\Pi_1(S_{|x|}(0)) = 0\} \mathbb{I}\{\Pi_2(S_{|x|}(0)) = 0\} \Pi_1(dx) \\ &= 2\pi\lambda_1 \int_0^\infty r B_{0,1}(r) \exp\{-\pi r^2(\lambda_1 + \lambda_2)\} dr = \frac{\lambda_1}{\lambda_1 + \lambda_2} \mathcal{R}_{\lambda_1 + \lambda_2}(B_{0,1}(\bullet)) \end{aligned} \quad (11)$$

and a similar formula for  $\mathbf{E}_0^0 \mathcal{A}'(\Pi)$ . Combining all the above results, we obtain

$$\mathbf{E}_1^0 G = C_1 + \frac{\lambda_0 C_0}{\lambda_1 + \lambda_2} + \frac{\lambda_0}{\lambda_1 + \lambda_2} \mathcal{R}_{\lambda_1 + \lambda_2}(A_{0,1}(\bullet) + B_{0,1}(\bullet)). \quad (12)$$

Consider now the Palm space of  $\Pi_2$ . On this space,

$$G(\Pi) = C_2 + \int_{V_0(\Pi_2)} [G(\theta_x \Pi) + \mathcal{B}(\theta_x \Pi) + \mathcal{N}(\theta_x \Pi) \mathcal{A}(\theta_x \Pi)] \Pi_1(dx) \quad (13)$$

$$+ \int_{V_0(\Pi_1 \cup \Pi_2)} [G(\theta_x \Pi) + \mathcal{B}''(\theta_x \Pi) + \mathcal{A}''(\theta_x \Pi)] \Pi_0(dx) \quad (14)$$

and as in (10), the last integration over  $V_0(\Pi_1 \cup \Pi_2)$  can be replaced by an integration over  $V_0(\Pi_2)$ . Therefore using (28), we get

$$\mathbf{E}_2^0 G = C_2 + \frac{\lambda_1}{\lambda_2} \mathbf{E}_1^0 [G + \mathcal{B} + \mathcal{N} \mathcal{A}] + \frac{\lambda_0}{\lambda_2} \mathbf{E}_0^0 [G + \mathcal{B}'' + \mathcal{A}'']. \quad (15)$$

We have

$$\begin{aligned}
\mathbf{E}_0^0 G &= C_0; \\
\mathbf{E}_0^0 \mathcal{A}''(\Pi) &= \mathbf{E} \int A_{0,2}(|z|) \mathbb{I}\{\Pi_1(S_{|z|}(0)) = 0\} \mathbb{I}\{\Pi_2(S_{|z|}(0)) = 0\} \Pi_2(dz) \\
&= 2\pi\lambda_2 \int_0^\infty r A_{0,2}(r) \exp\{-\pi r^2(\lambda_1 + \lambda_2)\} dr; \\
\mathbf{E}_0^0 \mathcal{B}''(\Pi) &= 2\pi\lambda_2 \int_0^\infty r B_{0,2}(r) \exp\{-\pi r^2(\lambda_1 + \lambda_2)\} dr.
\end{aligned}$$

The expression for  $\mathbf{E}_1^0 \mathcal{B}$  is given by (6) with  $k = 2$ , but some difficulties arise when computing  $\mathbf{E}_1^0 \mathcal{N}\mathcal{A}$  since these variables are no longer independent. However, we can write

$$\begin{aligned}
\mathbf{E}_1^0 \mathcal{N}\mathcal{A} &= \mathbf{E}_1^0 \int_{V_0(\Pi_1 \cup \Pi_2)} \Pi_0(dx) \int A_{1,2}(|z|) \mathbb{I}\{\Pi_2(S_{|z|}(0)) = 0\} \Pi_2(dz) \\
&= \mathbf{E}_1^0 \iint A_{1,2}(|z|) \mathbb{I}\{\Pi_1(S_{|x|}(x)) = 0\} \\
&\quad \mathbb{I}\{\Pi_2(S_{|x|}(x) \cup S_{|z|}(0)) = 0\} \Pi_0(dx) \Pi_2(dz) \\
&= \lambda_0 \mathbf{E} \iint A_{1,2}(|z|) e^{-\lambda_1 \pi |x|^2} \mathbb{I}\{\Pi_2(S_{|x|}(x) \cup S_{|z|}(0)) = 0\} dx \Pi(dz) \\
&= \lambda_0 \lambda_2 \iint A_{1,2}(|z|) e^{-\lambda_1 \pi |x|^2} \mathbf{P}_2^0[\theta_{-z} \Pi_2(S_{|x|}(x) \cup S_{|z|}(0)) = 0] dx dz.
\end{aligned}$$

Notice that the probability

$$\mathbf{P}_2^0[\theta_{-z} \Pi_2(S_{|x|}(x) \cup S_{|z|}(0)) = 0]$$

above is 0 unless  $z \notin S_{|x|}(x)$ . Switching to polar coordinates, the last expression reads

$$\begin{aligned}
&2\pi\lambda_0\lambda_2 \iint r A_{1,2}(r) e^{-\lambda_1 \pi |x|^2} \mathbf{P}_2^0[\theta_{(r,0)} \Pi_2(S_{|x|}(x) \cup S_r(0)) = 0] dx dr \\
&= 2\pi\lambda_0\lambda_2 \iint_{\Delta} r A_{1,2}(r) \exp\{-\lambda_1 \pi |x|^2 - \lambda_2 |S_{|x|}(x) \cup S_r(0)|\} dx dr,
\end{aligned}$$

where the integration is over

$$\Delta = \{(x, r) \in \mathbb{R}^2 \times \mathbb{R}_+ \text{ such that } (r, 0) \notin S_{|x|}(x)\}.$$

This integral can be simplified if we represent  $x$  in polar coordinates of the form  $(r\rho, \phi)$  and adopt  $\rho$  as new integration variable. Then

$$\mathbf{E}_1^0 \mathcal{N}\mathcal{A} = 2\pi\lambda_0\lambda_2 \int_0^\infty r^3 A_{1,2}(r) dr \iint_{\delta} \rho \exp\{-r^2(\lambda_1 \pi \rho^2 + \lambda_2 U(\rho))\} d\rho d\phi,$$

where  $U(\rho)$  is the area of the union of the discs  $S_\rho(\rho \cos \phi, \rho \sin \phi)$  and  $S_1(0)$ , and where the double integral is over the set  $\delta$  of couples  $(\rho, \phi)$  such that  $S_\rho(\rho \cos \phi, \rho \sin \phi)$  does not contain point  $(1, 0)$ , i. e. over

$$\phi \in \left[ \mathbb{I}\{\rho > 1/2\} \arccos \frac{1}{2\rho}, 2\pi - \mathbb{I}\{\rho > 1/2\} \arccos \frac{1}{2\rho} \right].$$

Thus we finally get

$$\mathbf{E}_1^0 \mathcal{N}\mathcal{A} = 4\pi\lambda_0\lambda_2 \int_0^\infty r^3 A_{1,2}(r) dr \int_0^\infty \rho \left( \pi - \mathbb{I}\{\rho > 1/2\} \arccos \frac{1}{2\rho} \right) \times \exp\{-r^2(\lambda_1\pi\rho^2 + \lambda_2 U(\rho))\} d\rho, \quad (16)$$

where

$$U(\rho) = \begin{cases} \pi & \text{if } \rho \in [0, 1/2] \\ \pi + \frac{1}{2}\sqrt{4\rho^2 - 1} + (2\rho^2 - 1) \arccos \frac{1}{2\rho} & \text{if } \rho > 1/2 \end{cases} \quad (17)$$

as elementary geometrical considerations show.

We combine all the above results in the following theorem.

**Theorem 2.** For 3-level hierarchical model with direct connections we have

$$\mathbf{E}_1^0 G = C_1 + \frac{\lambda_0}{\lambda_1 + \lambda_2} C_0 + \frac{\lambda_0}{\lambda_1 + \lambda_2} \mathcal{R}_{\lambda_1 + \lambda_2}(A_{0,1}(\bullet) + B_{0,1}(\bullet)); \quad (18)$$

$$\begin{aligned} \mathbf{E}_2^0 G &= C_2 + \frac{\lambda_0}{\lambda_2} \left[ C_0 + \frac{\lambda_1}{\lambda_1 + \lambda_2} \mathcal{R}_{\lambda_1 + \lambda_2}(A_{0,2}(\bullet) + B_{0,2}(\bullet)) \right] \\ &\quad + \frac{\lambda_1}{\lambda_2} \left[ \mathbf{E}_1^0 G + \mathcal{R}_{\lambda_2}(B_{1,2}(\bullet)) + \mathbf{E}_1^0 \mathcal{N}\mathcal{A} \right], \end{aligned} \quad (19)$$

where  $\mathbf{E}_1^0 \mathcal{N}\mathcal{A}$  is given by (16) and  $\mathcal{R}_\lambda(f(\bullet))$  is defined by (8).

In the case when  $A_{1,2}(r) = a_{1,2}r^{\alpha_{1,2}}$  the integration over  $r$  in (16) can be explicitly made leading to

$$\begin{aligned} \mathbf{E}_1^0 \mathcal{N}\mathcal{C} &= 4\pi\lambda_0\lambda_2 a_{1,2} \Gamma\left(\frac{\alpha_{1,2}+3}{2}\right) \\ &\quad \int_0^\infty \rho \left( \pi - \mathbb{I}\{\rho > 1/2\} \arccos \frac{1}{2\rho} \right) \left( \lambda_1\pi\rho^2 + \lambda_2 A(\rho) \right)^{-\frac{\alpha_{1,2}+3}{2}} d\rho \\ &= \frac{2\lambda_0\lambda_2 a_{1,2} \Gamma\left(\frac{\alpha_{1,2}+1}{2}\right)}{\lambda_1 \pi^{\frac{\alpha_{1,2}-1}{2}}} \left[ \lambda_2^{-\frac{\alpha_{1,2}+1}{2}} - (\lambda_1/4 + \lambda_2)^{-\frac{\alpha_{1,2}+1}{2}} \right] \\ &\quad + 2^{\alpha_{1,2}+3} \pi\lambda_0\lambda_2 a_{1,2} \Gamma\left(\frac{\alpha_{1,2}+3}{2}\right) \\ &\quad \int_0^{\pi/2} \frac{(\pi - \gamma) \sin \gamma \cos^{\alpha_{1,2}} \gamma d\gamma}{[\pi(\lambda_1 + 2\lambda_2) + \lambda_2 \sin 2\gamma + 2\lambda_2(\pi - \gamma) \cos 2\gamma]^{\frac{\alpha_{1,2}+3}{2}}}, \end{aligned} \quad (20)$$

where  $\gamma = \arccos \frac{1}{2\rho}$ . Using

$$\mathcal{R}_\lambda(ar^\alpha) = a(\pi\lambda)^{-\alpha/2} \Gamma(\alpha/2 + 1),$$

an explicit expression for the cost is obtained after substitution of (20) into (19).

In particular, if all  $\alpha_{i,j} = \beta_{i,j} = 1$  we get

$$\begin{aligned} \mathbf{E}_2^0 G = & C_2 + \frac{\lambda_1}{\lambda_2} C_1 + \frac{\lambda_0(2\lambda_1 + \lambda_2)}{\lambda_2(\lambda_1 + \lambda_2)} C_0 + \frac{b_{1,2}\lambda_1}{2\lambda_2^{3/2}} + \frac{2\lambda_0\lambda_1 a_{1,2}}{\lambda_2(\lambda_1 + 4\lambda_2)} \\ & + 8\pi\lambda_0\lambda_1 a_{1,2} \int_0^{\pi/2} \frac{(\pi - \gamma) \sin 2\gamma d\gamma}{[\pi(\lambda_1 + 2\lambda_2) + \lambda_2 \sin 2\gamma + 2\lambda_2(\pi - \gamma) \cos 2\gamma]^2} \\ & + \frac{\lambda_0(a_{0,2} + b_{0,2})}{2(\lambda_1 + \lambda_2)^{3/2}} + \frac{\lambda_0\lambda_1(a_{0,1} + b_{0,1})}{2\lambda_2(\lambda_1 + \lambda_2)^{3/2}}. \end{aligned} \quad (21)$$

### 4.3 Numerical examples and comparison

Unfortunately, there are no closed form expressions of the optimal value of parameters for this model. Figure 5 shows a numerical example for the costs of the strictly hierarchical model and the model with direct connections, for the following choice of the parameters.

- intensities:  $\lambda_0 = 10.91$ ,  $\lambda_2 = 0.018$ ;
- station costs:  $C_0 = 4$ ,  $C_1 = 18$ ;
- capacity and infrastructure cost functions:  $A_{i,j}(r) = 4r$ ,  $B_{i,j}(r) = 9r$  for all  $i, j \in \{0, 1, 2\}$ .

(the second level station cost  $C_2$  is not pertinent for the optimal  $\lambda_1$  and can be taken equal to 0). As we see, for these values, allowing direct connections always improves the cost of the system. The optimal value of the intensity of  $\Pi_1$  in the strictly hierarchical model is  $\lambda_1 \approx 0.779$ , with cost  $\mathbf{E}_2^0 G \approx 18154$ . For the model with direct connections, the optimal value is  $\lambda_1 \approx 0.721$ , and the cost is  $\mathbf{E}_2^0 G \approx 16168$ .

Note the difference in behavior of the cost functions for small  $\lambda_1$ . For  $\lambda_1$  small, there are mostly direct connections between 0 and 2-nd level stations, if they are allowed. The topology of the system becomes star-shaped as in two level systems. The cost of the model with direct connections is  $\mathbf{E}_2^0 G \approx 31789$  for  $\lambda_1 = 0$ . In contrast, in the strictly hierarchical model, the 0-level stations are connected to 1-st level stations even if they are far away, which makes the cost of the system explode as  $\lambda_1$  vanishes.

In another example we take the same values of the parameters except for  $B_{0,1}(r) = B_{0,2}(r) = 0.1r$ . As in the previous example, direct connections improve the cost. But although for this model there is a local minimum of the cost function in point  $\lambda_1 \approx 0.233$ , the global minimum of the cost  $\mathbf{E}_2^0 G \approx 11686$  is attained in  $\lambda_1 = 0$ , i.e when there are no distribution points at all (see Figure 6).

In the last example  $A_{i,j}(r) = 0.4r$ , for all  $i, j \in \{0, 1, 2\}$ ,  $B_{0,1}(r) = 0.1r$ ,  $B_{0,2} = 0.4r$  and  $B_{1,2} = 9r$ . We see that the optimal architecture here is strictly hierarchical, except for very small values of  $\lambda_1$ . The optimal intensity is  $\lambda_1 \approx 0.089$  and the minimal cost gives the hierarchical model:  $\mathbf{E}_2^0 G \approx 4091$  (see Fig. 7). The corresponding optimal topology is visualized on Figure 1 and was drawn with the help of the program ARC (see [13]).

## 5 Related spanning problems

The methods considered in the previous sections can easily be adapted to other applications. Two examples of such applications are considered below.

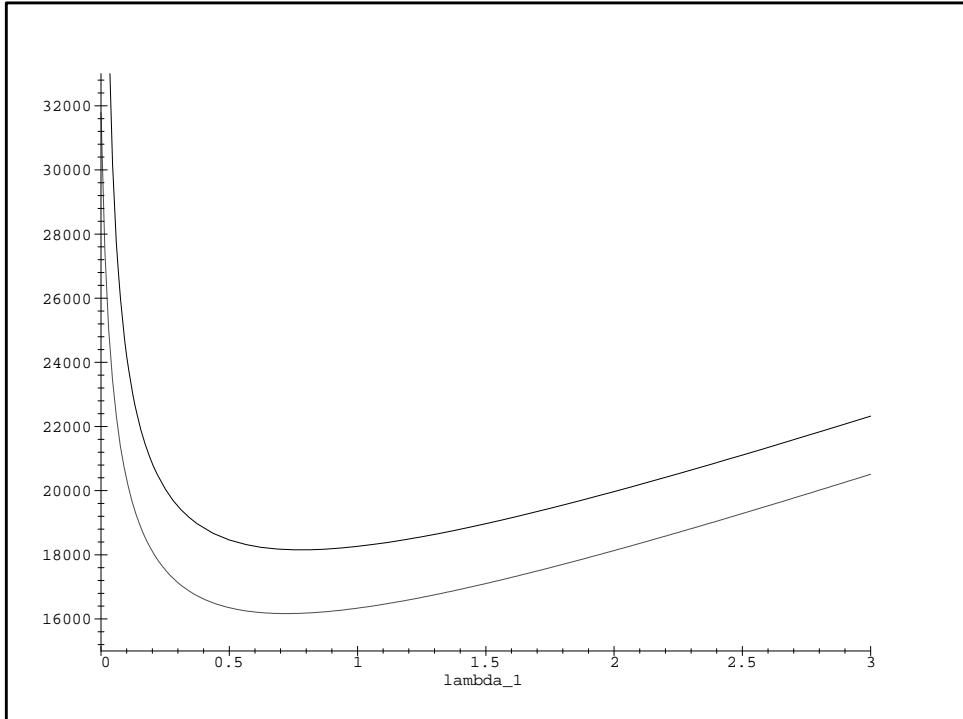


Figure 5: Cost function in the hierarchical model (the upper curve) and the model with direct connections ( $a_{i,j} = 4$ ,  $b_{i,j} = 9$ ).

### 5.1 Tracking in mobile communication systems

Consider two independent Poisson point processes  $\Pi_0$  and  $\Pi_1$  representing respectively the positions of mobile subscribers at time 0 and the positions of the *base stations* of the network. The base station located in point  $x$  of  $\Pi_1$  is an antenna allowing for hertzian communication with any mobile located inside the  $\Pi_1$ -Voronoi cell with nucleus  $x$ . In case attenuation increases with distance in a translation-invariant and isotropic way, and if all stations have the same emission power, this cell is also the part of the plane where the reception level of the antenna located in  $x$  is best.

However the mobility of the points of  $\Pi_0$  (which we will discuss below) creates a new problem which is that of *mobile tracking*. The system has to know where each mobile is located at any given time. This is particularly true for mobiles which are not in communication. Should any of those be called, the system has to be able to find the cell where the mobile is located at the time of the call.

This is done by updating the position of each mobile in some database, which is organized as follows: there is a third level of stations which we will refer to as *location* stations. This level will be represented as an independent Poisson process  $\Pi_2$ . The database is updated each time a mobile crosses a  $\Pi_2$ -cell boundary. So, one always knows the  $\Pi_2$ -cell in which the called mobile is located. In case of a call for

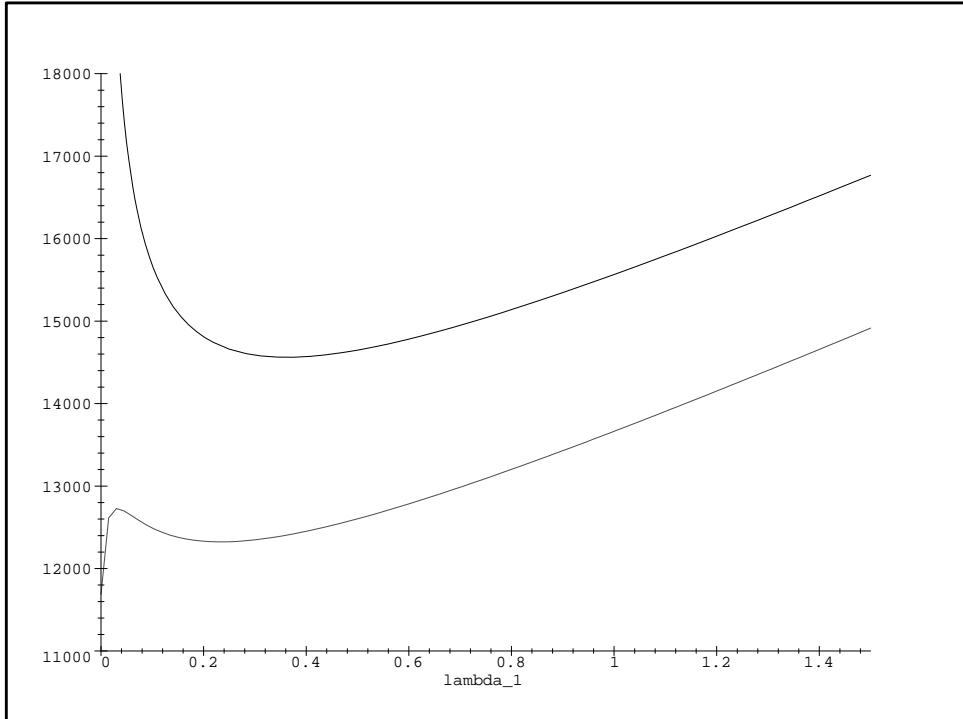


Figure 6: Cost function in the hierarchical model (the upper curve) and the model with direct connections with a small infrastructure cost on the lowest level ( $a_{i,j} = 4$ ,  $b_{0,1} = b_{0,2} = 0.1$ ,  $b_{1,2} = 9$ ).

a mobile, it is then enough to broadcast a search message to all base stations in this  $\Pi_2$  cell to find the mobile and to establish the communication.

There are two tracking costs associated with this scheme:

1. an *update cost* which comes from the update messages sent by all mobiles to the database; we will represent this as a linear function of the number of mobiles crossing  $\Pi_2$ -cell boundaries per unit of time; let  $X$  denote the cost of one update message.
2. a *search cost* which comes from the search messages sent to all called mobiles; let  $Y(n)$  denote the cost to broadcast the search messages for a mobile located in a  $\Pi_2$ -cell with  $n$  base stations.

Here, the problem consists in finding the intensity of the location stations, which minimizes the tracking cost.

We now give a precise definition of the cost function.

Assume that the reference probability space carries three independent point processes  $\Pi_0$ ,  $\Pi_1$  and  $\Pi_2$ , together with some marks associating a random motion in  $\mathbb{R}^2$ , with each point of  $\Pi_0$ . Below,  $\Pi$  denotes a realization of these point processes together with their marks.

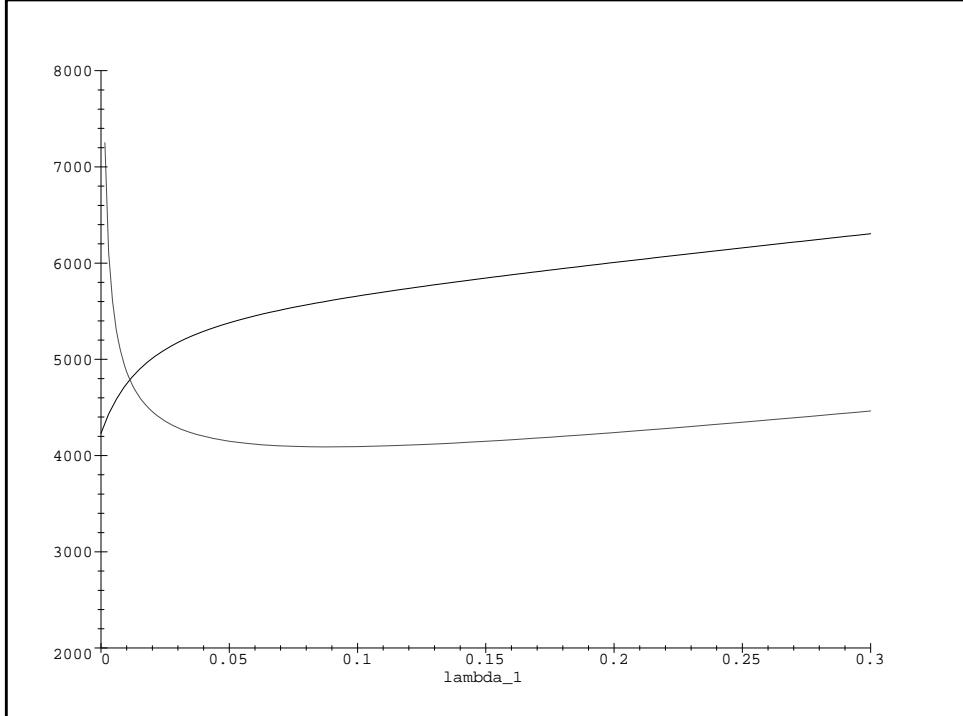


Figure 7: Example when the strictly hierarchical model provides the optimal cost ( $a_{i,j} = 0.4$ ,  $b_{0,1} = 0.1$ ,  $b_{0,2} = 0.4$ ,  $b_{1,2} = 9$ ).

We assume that these marks are such that the *temporal* point process which gives the epochs when the mobile initially located in 0 crosses  $\Pi_2$ -cell boundaries, is stationary.

A simple example is that when the mark is chosen independently for each mobile and represents the trajectory of the mobile together with its velocity  $v$ , which it keeps constant. It is naturally to assume that the trajectory of a mobile is continuous and piecewise 1-differentiable. >From [7, Formula (7.22)], the intensity of intersections of  $\Pi_2$ -cell boundaries with a straight line is equal to  $4\lambda_2^{1/2}/\pi$ . Therefore approximating each differentiable part of the trajectory by a segment, we see that the mean number of crossings during time  $\Delta t$  equals  $4v\Delta t\sqrt{\lambda_2}/\pi + o(\Delta t)$ . Thus the *temporal* intensity of the cell boundary crossings by a mobile is given by

$$\mathcal{X} = \frac{4v\lambda_2^{1/2}}{\pi}$$

(see also [6] on intersections of a stationary fiber process with curves).

On the Palm space of  $\Pi_0$ , let

- $\mathcal{X}(\Pi)$  be the temporal intensity of the crossings of  $\Pi_2$ -cell boundaries by the mobile located in 0.

- $\mathcal{Y}(\Pi)$  be the search cost of the mobile located in 0.

If we denote  $\mu$  the intensity of calls directed to mobile 0 (we assume that this is a constant), then the tracking cost per unit of time and space is naturally defined as

$$\mathbf{E} G = \mathbf{E} \int_{[0,1]^2} (\mathcal{X}(\theta_x \Pi) + \mu \mathcal{Y}(\theta_x \Pi)) \Pi_0(dx), \quad (22)$$

that is, using Campbell's refined formula and the independence assumptions

$$\begin{aligned} \mathbf{E} G &= \lambda_0 \mathbf{E}_0^0[\mathcal{X}(\Pi)] + \lambda_0 \mu \mathbf{E}_0^0[\mathcal{Y}(\Pi)] \\ &= \lambda_0 X \frac{4\bar{v}\lambda_2^{\frac{1}{2}}}{\pi} + \lambda_0 \mu \mathbf{E}[Y(\Pi_1(\tilde{V}_0(\Pi_2)))] , \end{aligned} \quad (23)$$

where  $\bar{v}$  is the mean velocity of the mobiles and  $\tilde{V}_0(\Pi_2)$  is the Voronoi cell constructed with respect to  $\Pi_2$  containing the origin in its interior. In case  $Y(n) = Y \cdot n$  we have

$$\begin{aligned} \mathbf{E} \Pi_1(V_0(\Pi_2)) &= \mathbf{E} \sum_{y_i \in \Pi_1} \sum_{z_j \in \Pi_2} \mathbb{I}\{y_i \in V_{z_j}(\Pi_2)\} \mathbb{I}\{0 \in V_{z_j}(\Pi_2)\} \\ &= \lambda_1 \mathbf{E} \sum_{z_j \in \Pi_2} \int \mathbb{I}\{y \in V_0(\theta_{z_j} \Pi_2)\} \mathbb{I}\{-z_j \in V_0(\theta_{z_j} \Pi_2)\} dy \\ &= \lambda_1 \lambda_2 \mathbf{E}_2^0 \iint \mathbb{I}\{y \in V_0(\Pi_2)\} \mathbb{I}\{z \in V_0(\Pi_2)\} dy dz \\ &= \lambda_1 \lambda_2 \mathbf{E}_2^0 |V_0(\Pi_2)|^2 , \end{aligned}$$

since  $V_0(\Pi_2)$  and  $-V_0(\Pi_2)$  have the same distribution. Using the fact that  $\mathbf{E}_2^0 |V_0(\Pi_2)|^2 = 35/(8\pi^2 \lambda_2^2)$  (see e.g. [9, p. 324]), we obtain the following explicit expression for the cost function:

$$\mathbf{E} G = H_1 \lambda_2^{\frac{1}{2}} + H_2 \frac{\lambda_1}{\lambda_2} \quad (24)$$

with

$$H_1 = \frac{4\bar{v}\lambda_0 X}{\pi}, \quad H_2 = \frac{35}{8\pi^2} \lambda_0 \lambda_1 \mu Y$$

and the minimum is reached for

$$\lambda_2^* = \left( \frac{2H_2}{H_1} \right)^{\frac{2}{3}} = \left( \frac{35\lambda_1 \mu Y}{32\pi \bar{v} X} \right)^{\frac{2}{3}} .$$

*Remark 2.* Since the location stations are used to broadcast search messages to the antennas and eventually to concentrate communications from or to mobiles connected to these antennas, they can also be seen as a higher level of stations allowing to reach the base stations according to the least distance connection principle. So, one can also naturally consider a cost associated with these connections which is similar to what was considered in the previous sections, namely a capacity cost and an infrastructure cost.

## 5.2 Infinite spanning graphs

In all preceding cases, we assumed that the points of highest level (e.g. the roots of the trees) were linked via some connected network, which was then ignored. The aim of this subsection is to take this additional structure into account within our parametric setting, and to show that optimization problems similar to those considered above can be also addressed.

Consider the following problem which is an infinite volume analog of the classical minimal spanning graph problem in a bounded region [11]. Let  $\Pi_\lambda$  be a homogeneous Poisson process with intensity  $\lambda$  in  $\mathbb{R}^2$ . Can we find a connected planar graph with vertices in all the points of the Poisson process with minimal “connection cost density” that is such that the cost of the edges of the graph per unit area is minimal. We have put quotes because such a quantity is only well defined for finite graphs, and it may not exist for the infinite volume case.

Suppose that for all realizations of a homogeneous Poisson process  $\Pi_\nu$  with intensity  $\nu$ , we are given a rule to construct a connected graph  $\mathcal{G}(\Pi_\nu)$  with vertex set  $\Pi_\nu$ . Let  $S_N$ ,  $N \in \mathbb{N}$  be a family of compact sets, where  $S_1$  is a 1-connected figure with unit area containing the origin in its interior, and  $S_N$  is homothetic to  $S_1$  with coefficient  $N^{1/2}$ . Let  $L_N(\Pi_\nu)$  be the total length of (the parts of) the graph’s edges lying in  $S_N$  and assume that the following almost sure limit

$$C_{\mathcal{G}} \stackrel{\text{def}}{=} \lim_{N \rightarrow \infty} L_N(\Pi_\nu) / (N\nu)^{1/2}$$

exists and does not depend on  $S_1$ . Examples of such graphs include the Delaunay triangulation, for which  $C_{\mathcal{G}} = 32/(3\pi) \approx 3.395$  (cf. [9, p.324]). The Delaunay triangulation seems to be a good first approximation of what is observed in existing communications networks. Another example is the optimal spanning tree, for which  $C_{\mathcal{G}} \approx 0.656$  (see [10]; the existence of the limit was proved in [11]). As already mentioned above, there is a basic difference between this and the preceding case as minimal spanning trees are only well defined in the finite volume case.

Consider now the following variant of the basic problem of §2-3: we split of the initial process  $\Pi_\lambda$  into independent subprocesses  $\Pi_1, \dots, \Pi_n$  with intensities  $\lambda_1, \dots, \lambda_n$ ,  $\sum_{i=1}^n \lambda_i = \lambda$ , say by a Bernoulli thinning. Then the spanning graph consists of the set of Poisson-Voronoi hierarchical spanning trees rooted in the points of the process  $\Pi_n$  (see Section 3) and the graph  $\mathcal{G}(\Pi_n)$  at the highest level. We assume that the cost of a tree edge is its length and the cost of an edge of  $\mathcal{G}$  is its length times a weight  $\sigma$ .

By Theorem 1 the edge-cost density of this spanning graph is

$$F = \sum_{k=2}^n \frac{\lambda_{k-1}}{2\sqrt{\lambda_k}} + \sigma C_{\mathcal{G}} \sqrt{\lambda_n}$$

and the problem now consists in finding the parameters  $n, \lambda_1, \dots, \lambda_n$  which minimize the value of  $F$ .

Numerical evidence shows that the optimal value  $n$  of the number of levels is closely related to the value of  $\sigma C_{\mathcal{G}}$ . The larger  $\sigma C_{\mathcal{G}}$ , the larger the optimal value of  $n$  and the larger the optimal proportion of points connected through the trees. On the opposite, if  $\sigma C_{\mathcal{G}} < 1$  then  $n = 1$  is optimal and the graph  $\mathcal{G}(\Pi_\lambda)$  itself is the optimal topology in the described class.

If  $\mathcal{G}(\Pi)$  is the Delaunay triangulation on the point set  $\text{supp } \Pi$ , and if  $\sigma = 1$ , then the optimal values of the parameters are the following:  $n = 3$ ,  $\lambda_1 \approx 0.7121\lambda$ ,  $\lambda_2 \approx 0.2466\lambda$  and  $\lambda_3 \approx 0.0413\lambda$ . In this case the minimal value of the cost is approximately  $2.014\sqrt{\lambda}$ , a typical configuration of this optimal spanning graph is shown in Figure 8.

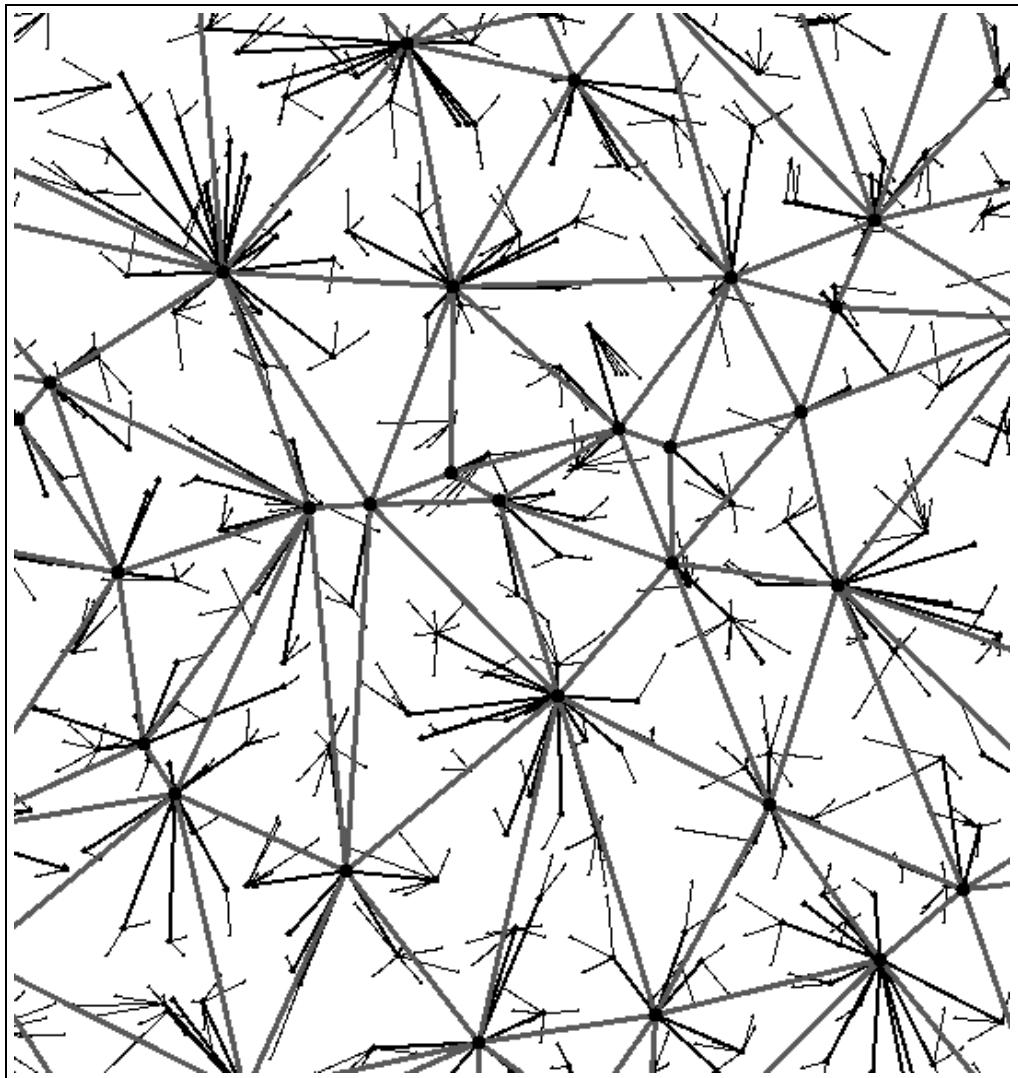


Figure 8: The optimal spanning graph with Delaunay triangulation in the highest level.

### 5.3 Simulation approach

Quite often analytical expressions for the average cost functions of stochastic models of the considered type are difficult to compute, even in the case considered here where all point processes are Poisson processes. In many such cases, the stochastic gradient method introduced in [3] can then be applied for estimating the optimum. It consists in finding efficient ways of calculating or of estimating the gradients  $\frac{\partial}{\partial \lambda_i} \mathbf{E} G$  and then using steepest descent type algorithms to find the optimum. For details and examples of applications of this technique in telecommunication studies see [13] and the references therein.

## Appendix

### A Point processes refresher

In this Appendix we remind some basic notions of Palm theory of point processes and derive formulas which have been used in the paper.

Throughout this section,  $X$  denotes the *phase space* of the point processes which is always here the  $d$ -dimensional Euclidean space  $\mathbb{R}^d$  (generalizations to the case of locally compact topological groups are not difficult).  $\mathcal{B}$  denotes the Borel  $\sigma$ -algebra of  $\mathbb{R}^d$ ,  $\mathcal{N}$  the set of  $\sigma$ -finite counting measures on  $\mathcal{B}$ ,  $\mathfrak{B}$  the  $\sigma$ -algebra of subsets of  $\mathcal{N}$  generated by the events  $\{\eta \in \mathcal{N} : \eta(B) = k\}$ , where  $B \in \mathcal{B}$  and  $k = 0, 1, 2, \dots$ . Each  $\eta \in \mathcal{N}$  can be represented as a countable sum  $\sum_i n_i \delta_{x_i}$  of Dirac measures with masses  $n_i \in \mathbb{N}$ , where  $x_i$  are all distinct (by definition  $\delta_x(B) = \mathbb{I}_B(x)$ ). The set  $\cup_i \{x_i\} = \text{supp } \eta$  is the *support* of the measure  $\eta$  and it has no accumulation point if  $\eta$  is  $\sigma$ -finite. A countable measure  $\eta$  is called *simple* if all  $n_i = 1$ .

By *point process*, we mean a measurable mapping  $N$  from some abstract probability space  $(\Omega, \mathcal{F}, \mathbf{P})$  into  $[\mathcal{N}, \mathfrak{B}]$ . We can for instance take  $[\Omega, \mathcal{F}]$  equal to  $[\mathcal{N}, \mathcal{B}]$ , and  $N$  is then the identity mapping. Enriching if necessary the phase space, one can always assume that all realizations of the point process are simple. The addition in  $X$  gives rise to measurable *flows* in  $[X, \mathcal{B}]$  and  $[\mathcal{N}, \mathfrak{B}]$ , defined as  $\theta_x B = B + x = \{y + x : y \in B\}$  for  $B \in \mathcal{B}$  and  $(\theta_x \eta)(B) \stackrel{\text{def}}{=} \eta(\theta_x B)$  for  $\eta \in \mathcal{N}$  and all  $B \in \mathcal{B}$ . In particular, if  $N = \sum_i \delta_{x_i}$  then  $\theta_x N = \sum_i \delta_{x_i - x}$ . The point process  $N$  is *stationary* with respect to the flow  $\theta_\bullet$  if the distributions of  $N$  and  $\theta_x N$  coincide for all  $x \in X$ . When dealing with several point processes, it is sometime convenient to introduce a shift  $\phi_x$ ,  $x \in X$  on the probability space  $(\Omega, \mathcal{F}, \mathbf{P})$ , which is assumed to preserve  $P$ , and to assume that this shift is compatible with the translations  $\theta_\bullet$  in  $\mathbb{R}^d$ , namely that

$$N(\phi_x \omega) = \theta_x N(\omega)$$

for all  $x$  and  $\omega$ . The *intensity measure* of  $N$  is the measure on  $\mathbb{R}^d$  defined by  $\Lambda(B) = \mathbf{E} N(B)$ ,  $B \in \mathcal{B}$ . If  $N$  is stationary then  $\Lambda(B) = \lambda |B|$ , where  $|B|$  is the Lebesgue measure of  $B$  and  $\lambda$  is the *intensity* of  $N$ .

In this paper we often operate with several point processes  $N_k$  in  $\mathbb{R}^2$ . The *Palm probability* of an event of the form  $\{\mathcal{N} \in \Xi\}$ , where  $\Xi$  belongs to  $\mathfrak{B}$  with respect to  $N_k$  is defined by

$$\mathbf{P}_k^0(\mathcal{N} \in \Xi) = \frac{1}{\lambda_k |B|} \mathbf{E} \int_B \mathbb{I}_\Xi(\theta_x N_k) N_k(dx), \quad (25)$$

where  $\lambda_k$  is the intensity of the process  $N_k$ ; it can be shown independent on the choice of  $B \in \mathcal{B}$ . The intuitive meaning is that of the conditional distribution "given there is a point of the process  $N_k$  in the origin 0". The expectation with respect to  $\mathbf{P}_k^0$  is denoted by  $\mathbf{E}_k^0$ . The *refined Campbell formula* for stationary marked processes follows by the standard monotone class argument from this definition:

$$\mathbf{E} \int F(x, N_k) N_k(dx) = \lambda_k \int \mathbf{E}_k^0 F(x, \theta_{-x} N_k) dx \quad (26)$$

for any measurable function  $F : \Omega \times \mathbb{R}^d \mapsto \mathbb{R}_+$  (cf. [12, Formula (4.4.11)]).

Let now  $g : \Omega \mapsto \mathbb{R}_+$  be a measurable function. The following identity which is a variant of well-known Ryll-Nardzewski formula (cf. [1, formula (4.1.2a)]) expresses the relationship between the Palm and the

original distribution of a marked stationary point process:

$$\mathbf{E} g(N) = \lambda_k \mathbf{E}_k^0 \int_{V_0(N_k)} g(\theta_x N) dx. \quad (27)$$

The set  $V_0(N_k)$  above is the *Voronoi cell* with *nucleus* 0 constructed with respect to the point set  $\text{supp } N_k$  (note that under Palm distribution  $\mathbf{P}_k^0$  there is a.s. a point of  $N_k$  at the origin 0). By definition  $V_0(N_k)$  consists of those points of  $\mathbb{R}^d$  which are closer to 0 than to any other point of  $\text{supp } N_k$ .  $V_0(N_k)$ , which coincides with the intersection of the half-spaces  $\{x : |x| \leq |x - x_i|\}$ ,  $x_i \in \text{supp } N_k$ ,  $V_0(N_k)$ , is a convex polygon.

Identity (27) is readily obtained by modification of the proof of Theorem 12.3.II of [4]. Take in (26) the function  $F(x, N)$  equal to  $g(N)$  if  $x$  is the closest to the origin point of the process  $N_k$  and to 0 otherwise. In the left-hand side of (26) we get the expectation  $\mathbf{E} g(N)$ . Then it can be verified that  $F(x, \theta_{-x} N) = g(\theta_{-x} N) \mathbf{1}_{-V_0(N_k)}(x)$ , where  $-V_0(N_k) = \{x : -x \in V_0(N_k)\}$  and (27) follows from the change of coordinates  $x \rightarrow -x$  in the right-hand side of (26).

The next formula plays the central role in our observations. It relates the Palm distributions with respect to different marks and can be considered as a higher-dimensional analog of Neveu's exchange formula [8] (see also [1, formula (3.4.1)]). Although it can be obtained by taking  $a(\omega, t)$  equal the indicator of the event "t is the closest to the origin point of the process  $N_1(\omega)$ " in the remark following the proof of Proposition 1 in [8, p.201], we, however, prefer to give a direct self-contained proof of this fact.

**Assertion 3.** *Let  $N_1$  and  $N_2$  be stationary with respect to the same flow  $\theta_\bullet$  processes. Then for any measurable  $f : \Omega \mapsto \mathbb{R}_+$  one has*

$$\lambda_1 \mathbf{E}_1^0 f(N) = \lambda_2 \mathbf{E}_2^0 \int_{V_0(\Pi_2)} f(\theta_x N) N_1(dx). \quad (28)$$

*Proof.* First we prove this formula for a bounded function  $f$ . Take a ball  $S_\varepsilon$  of the volume  $\varepsilon$  centered in the origin and put

$$g(N) = \varepsilon^{-1} \int_{S_\varepsilon} f(\theta_y N) N_1(dy)$$

in (27). We then can write

$$\begin{aligned} \mathbf{E} g(N) &= \lambda_1 \mathbf{E}_1^0 f(N) = \lambda_2 \mathbf{E}_2^0 \int_{V_0(\Pi_2)} \left[ \varepsilon^{-1} \int_{S_\varepsilon} f(\theta_{x+y} N) (\theta_x N_1)(dy) \right] dx \\ &= \lambda_2 \mathbf{E}_2^0 \int_{V_0(\Pi_2)} \varepsilon^{-1} \int_{S_\varepsilon+x} f(\theta_z N) N_1(dz) dx \\ &= \lambda_2 \mathbf{E}_2^0 \int \varepsilon^{-1} |(-S_\varepsilon + z) \cap V_0(\Pi_2)| f(\theta_z N) N_1(dz). \end{aligned}$$

Note that the function  $\varepsilon^{-1} |(-S_\varepsilon + z) \cap V_0(\Pi_2)| = \varepsilon^{-1} |(S_\varepsilon + z) \cap V_0(\Pi_2)|$  under the integral above tends to 1 as  $\varepsilon \rightarrow 0$  for all  $z$  in the interior of  $V_0(\Pi_2)$  and to 0 for all  $z$  in the interior of the complement of  $V_0(\Pi_2)$ . Since  $V_0(\Pi_2)$  is convex then its boundary has the Lebesgue measure 0 and thus (28) follows by the bounded convergence theorem. The case of unbounded integrable  $f$  follows by the standard monotone argument.  $\square$

## References

- [1] F. Baccelli and P. Brémaud. *Elements of queueing theory*. Number 26 in Applications of mathematics. Springer-Verlag, 1994.
- [2] F. Baccelli, M. Klein, M. Lebourges, and S. Zuyev. Géométrie aléatoire et architecture de réseaux de communications. *Annales des Télécommunications*, 51:158–179, 1996.
- [3] F. Baccelli, M. Klein, and S. Zuyev. Perturbation analysis of functionals of random measures. *Adv. in Appl. Probab.*, 27:306–325, 1995.
- [4] D. J. Daley and D. Vere-Jones. *An Introduction to the Theory of Point Processes*. Springer, New York, 1988.
- [5] S. Foss and S. Zuyev. On a certain Voronoi aggregative process related to a bivariate Poisson process. *Adv. in Appl. Probab.*, 28, 1996.
- [6] J. Mecke. Formulas for stationary planar fiber processes III – intersection with fibre systems. *Math. Operations f. Statist., Ser. Statistics*, 12:201–210, 1981.
- [7] J. Møller. Random tessellations in  $R^d$ . *Adv. in Appl. Probab.*, 21:37–73, 1989.
- [8] J. Neveu. Sur les mesures de palm de deux processus ponctuels stationnaires. *Z. Wahrscheinlichkeitstheorie verw. Gebiete*, 34:199–203, 1976.
- [9] A. Okabe, B. Boots, and K. Sugihara. *Spatial tessellations*. Wiley series in probability and mathematical statistics. Wiley, N.Y., 1992.
- [10] F.D.K. Roberts. Random minimal trees. *Biometrika*, 55:255–258, 1968.
- [11] J.M. Steele. Growth rates of Euclidean minimal spanning trees with power weighted edges. *Ann. Probab.*, 16(4):1767–1787, 1988.
- [12] D. Stoyan, W.S. Kendall, and J. Mecke. *Stochastic Geometry and its Applications*. Wiley series in probability and mathematical statistics. Wiley, Chichester, second edition edition, 1995.
- [13] S. Zuyev, P. Desnogues, and H. Rakotoarisoa. Simulations of large telecommunication networks based on probabilistic modeling. Technical Report 2787, INRIA, Sophia-Antipolis, France, January 1996.



---

Unité de recherche INRIA Lorraine, Technopôle de Nancy-Brabois, Campus scientifique,  
615 rue du Jardin Botanique, BP 101, 54600 VILLERS LÈS NANCY  
Unité de recherche INRIA Rennes, Irisa, Campus universitaire de Beaulieu, 35042 RENNES Cedex  
Unité de recherche INRIA Rhône-Alpes, 655, avenue de l'Europe, 38330 MONTBONNOT ST MARTIN  
Unité de recherche INRIA Rocquencourt, Domaine de Voluceau, Rocquencourt, BP 105, 78153 LE CHESNAY Cedex  
Unité de recherche INRIA Sophia-Antipolis, 2004 route des Lucioles, BP 93, 06902 SOPHIA-ANTIPOLIS Cedex

---

Éditeur  
INRIA, Domaine de Voluceau, Rocquencourt, BP 105, 78153 LE CHESNAY Cedex (France)  
ISSN 0249-6399